

BV3V 5,000 PSI DIVERTER

Rated for 5000 PSI ~ Sizes from ¼" to 2" NPT/SAE/BSP
Designed as an inverse "T-Bore" Diverter for straight flow normal operation




The DMIC **BV3V** is a 3-way, "inverse T-Bore" diverter derived from the DMIC **BV3D**. DMIC's newest high-end CNC equipment and advancements in manufacturing tolerance control allow the **BV3V** to satisfy many normal 2-way with 3 way divert option. Consult DMIC Engineering for more information.

- Similar to BV3D, but offers a straight flow path for normal operation
- Can be used as a compact 2-way ball valve with test point outlet
- Standard DMIC Blow-out proof stem design
- Ordering codes similar to BV3D line
- Standard reduced Bore design
- Zero leakage design is a standard

Service Parts BOM

BV3V	SERVICE PARTS BOM	
Index	Qty	Description
1	1	Valve Body
2	1	Ball
3	1	Spindle
4	3*	Ball Seal
5	3*	End Connection(s)
6	3*	End Connection O-Ring(s)
7	1	Internal Thrust Washer
8	1	Spindle O-Ring(s)
9	1	External Glide Washer
10	1	Stop Pin
11	1	Stop Washer
12	1	Color Code Cap
13	1	Handle Screw
14	1	Handle

*Quantity depends on size and configuration

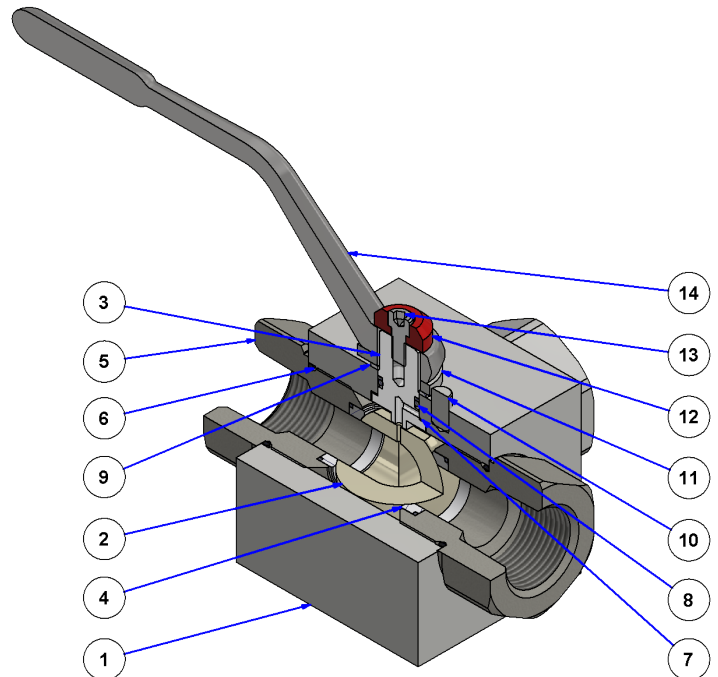

BV3V 5,000 PSI DIVERTER

Ordering Codes Summary

Size Codes

Code	Port Size
0250	1/4"
0375	3/8"
0500	1/2"
0750	3/4"
1000	1"
1250	1 1/4"
1500	1 1/2"
2000	2"

Call Factory for larger sizes 18"+

Connection Types

Imperial Threads		Metric Threads		ISO Threads	
Code	Description	Code	Description	Code	Description
S	SAE ORB	B	BSPP-special	IU	ISO6149
N	NPT	T	BSPT (Tapered Pipe)	-	-
MJ	JIC-Male				

Please see page 11 for complete connection availability matrix

SAE Flange Conn

SAE 4-Bolt Companion		SAE Split Flanges		SAE 4 Bolt Standard	
Code	Description	Code	Description	Code	Description
FM	SAE C61 Comp UNC	FL	SAE C61 Std UNC/Metric		
FH	SAE C62 Comp UNC	FK	SAE C62 Std UNC/Metric		
GM	SAE C61 Comp Metric				
GH	SAE C62 Comp Metric				
SM	SAE C61 Split Flg Head				
SH	SAE C62 Split Flg Head				

O-Ring Material

Code	Description
1	Buna-N (Standard)
2	EPR
3	Viton™

Ball Seal Material

Code	Description
1	Delrin™
2	PTFE Teflon™ (1500 PSI MAX)
4	Peek
6	Delrin™ AF (low Friction)

Ball & Spindle Mat'l

Code	Description
1	Carbon Steel
2	316 Stainless Steel
6	416 Stainless Spindle 316 Stainless Ball

Body Material


Code	Description
1	Carbon Steel
2	Stainless Steel

Ball Pattern

Code	Description
A	L-Bore 90° Action
C	Inverted T-Bore 90° Action
D	T-Bore 180° Action

See page 14 for accessory codes

Note: Changes from Standard Materials may result in changes to temperature and/or pressure rating.

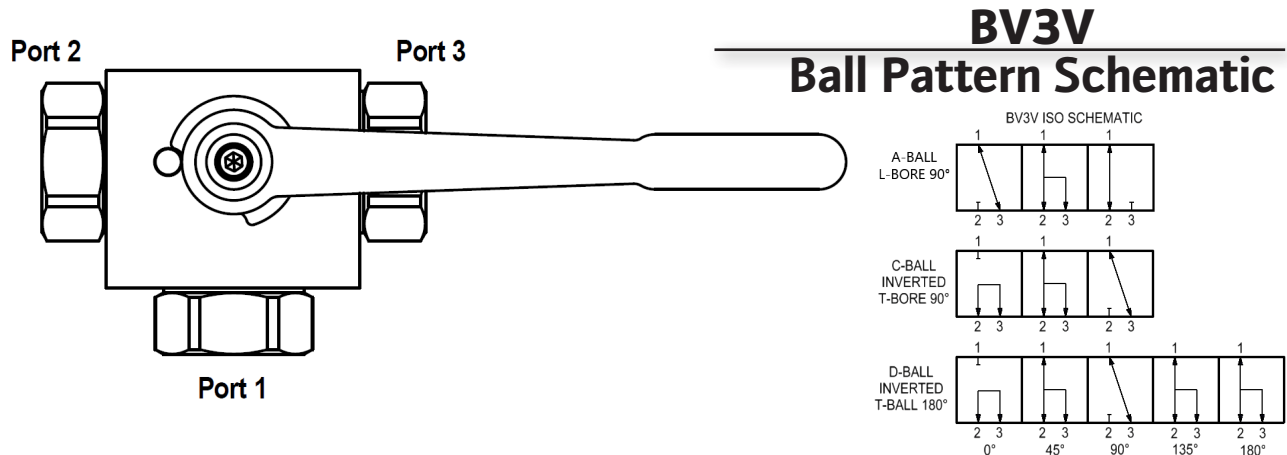


Due to our policy of continual product improvement, the specifications in this catalog may change without notice. When designing by spec, please request a certified print.



BV3V 5,000 PSI DIVERTER

Common Dimensions

Port Size	Rated Pressure PSI	Dimensions IN							
		Overall Length A	Width Port 1 B	Valve Bore C	Handle Length D	Overall Height E	Bot To Port Ctr F	Back of body to center G	Center to end H
¼"	5000	3.41	2.48	0.31	4.50	3.37	0.85	0.77	1.71
⅜"		3.41	2.48	0.31	4.50	3.37	0.85	0.77	1.71
½"		3.41	2.48	0.38	4.50	3.37	0.85	0.77	1.71
¾"		4.39	3.24	0.63	7.00	4.97	1.25	1.04	2.19
1"		5.20	3.91	0.81	7.00	5.47	1.64	1.31	2.60
1¼"		5.69	4.32	1.00	9.86	6.70	1.69	1.47	2.85
1½"		6.05	5.1	1.25	9.86	7.17	1.97	2.08	3.02
2"		8.00	6.28	1.63	9.86	7.70	2.21	2.28	4.00

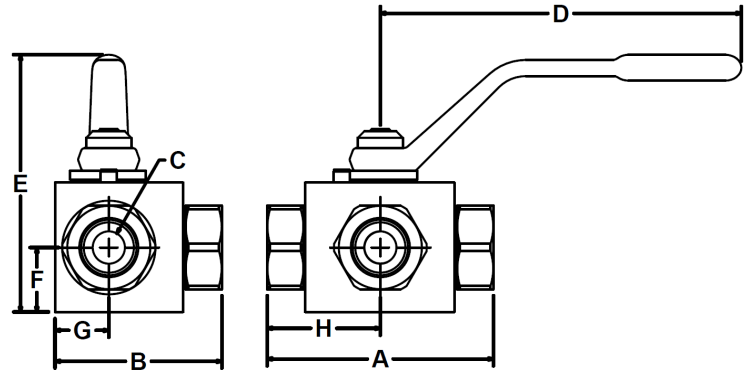

SAE C.61 Split Flange Head Dimension



Dimension (inches)	Rated Pressure PSI	Overall Length A _s	Width Port 1 B _s	Center to end H _s
½"	5000	6.00	3.77	3.00
¾"		6.86	4.47	3.43
1"		7.69	5.15	3.85
1¼"	4000	8.34	5.64	4.17
1½"	3000	10.29	7.22	5.14
2"		10.56	7.56	5.28

SAE C.62 Split Flange Head Dimension

Dimension (inches)	Rated Pressure PSI	Overall Length A _s	Width Port 1 B _s	Center to end H _s
½"	5000	6.00	3.77	3.00
¾"		7.34	4.71	3.67
1"		8.50	5.56	4.25
1¼"		9.62	6.28	4.81
1½"		12.27	8.21	6.13
2"		13.86	9.21	6.93







SAE C.61 & C.62 Bolt Flange Dimension

Dimension (inches)	Rated Pressure PSI C.61	Rated Pressure PSI C.62	Overall Length A _f	Width Port 1 B _f	Center to end H _f
½"	5000	5000	4.31	2.16	2.16
¾"			5.25	2.62	2.62
1"			5.98	2.99	2.99
1¼"			7.75	3.88	3.88
1½"	3000	3000	8.29	4.14	4.14
2"			9.52	4.76	4.76

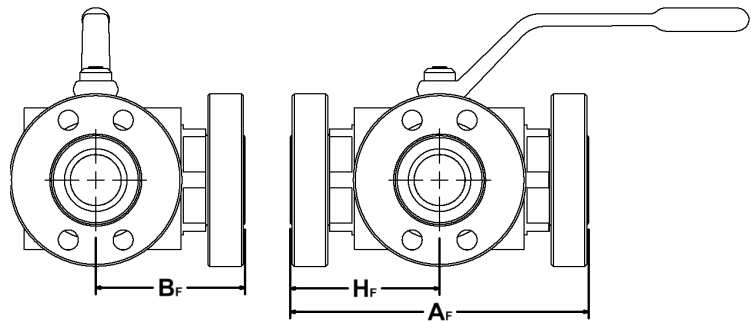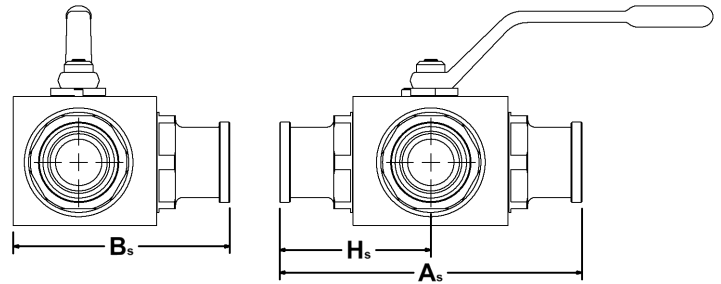

BV3V 5,000 PSI DIVERTER

Flow Characteristic and Actuation Torque Curves

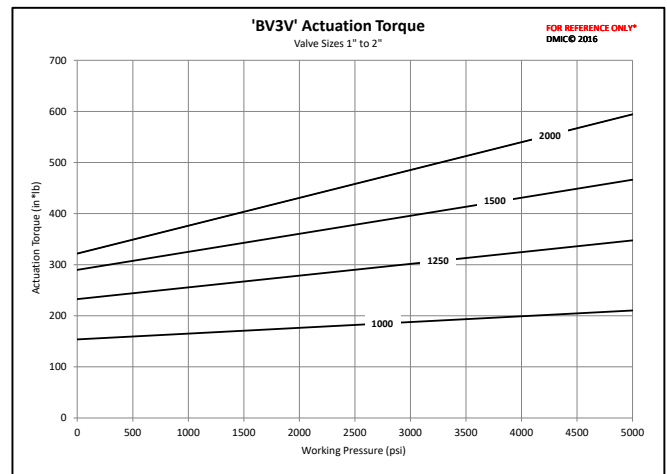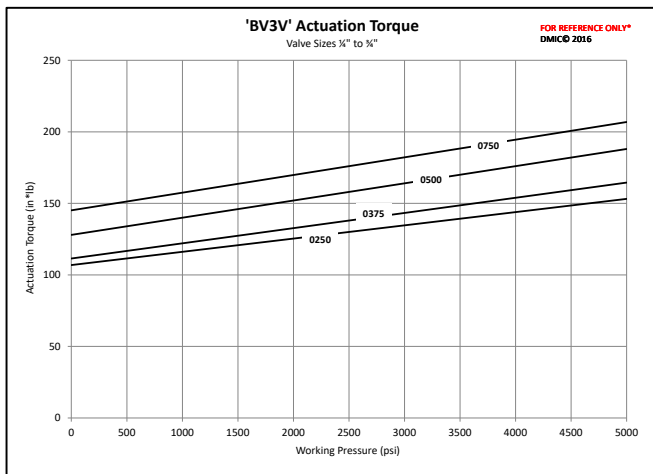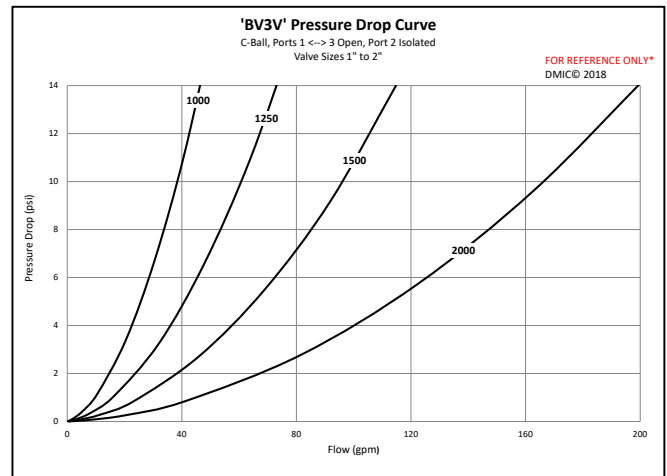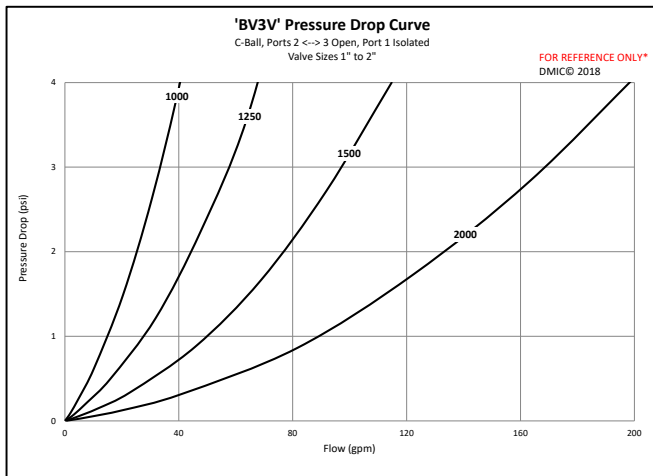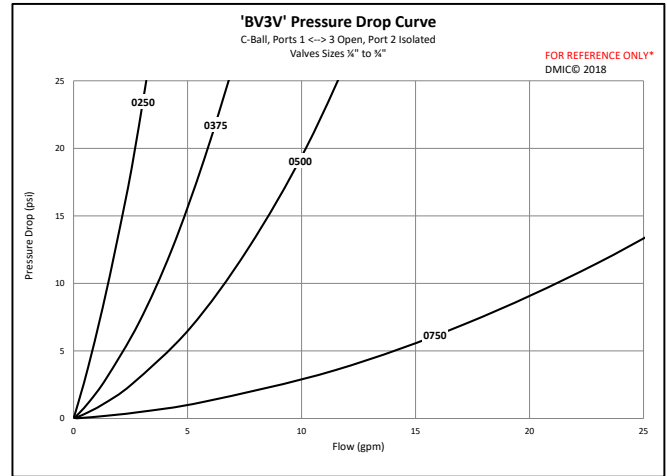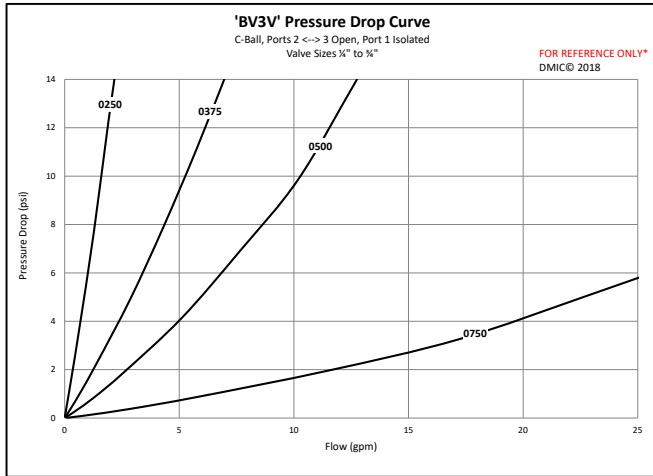

Due to our policy of continual product improvement, the specifications in this catalog may change without notice. When designing by spec, please request a certified print.



www.dmic.com
DMIC BALL VALVES CATALOG
COPYRIGHT ©2025 DELAWARE MFG.

DBV-2504A
PAGE 75

CALL TOLL FREE 1-800-248-3642
IN CANADA 1-800-320-3642



ISO 9001 CERTIFIED