

BVQ/BVQG 6000 PSI

Raises every standard: thermal, quality, durability ; -20°F to 400°F
High Quality Stainless Steel Fluid & Gas Valves ½" to 6"



BVQ

- All 316 Stainless steel construction standard.
- Standard sizes range from ½"-6" bore; Call for sizes greater than 2" bore.
- Designed for demanding applications where high performance & quality are required
- 6,000 PSI with generous design factor to eliminate damage due to pressure spikes.
- Wide variety of bolted end connections ideal for heavy industrial applications.
- Isolated spindle allows for use of 316 spindle without metal-to-metal contact; ideal for applications requiring an actuator.
- Standard High Temperature Peek ball seals & Viton™ seals. Other materials available for full fluid compatibility range.


BVQG ~ Gas Applications

- Improved ball seals specially designed for gas applications.
- Special material coatings improves life expectancy in dry environment.
- Anti-Static Feature Standard
- Assembled with Krytox Grease

** Please note:* For valves larger than 2", large pressure differentials may make the valve difficult to open and the pressure balance may be required. Ask your DMIC sales Associate for more info!

Service Parts BOM

BVQ/G	SERVICE PARTS BOM	
Index	Qty	Description
1	1	Valve Body
2	1	Ball
3	1	Spindle
4	2	Ball Seal
5	2	End Connection(s)
6	2	End Connection O-Ring(s)
7	1	Internal Thrust Washer
8	1	Spindle O-Ring(s)
9	1	External Glide Washer
10	1	Stop Pin
11	1	Stop Washer
12	1	Color Code Cap
13	1	Handle Screw
14	1	Handle
15	1	Spindle Bushing(s)
16	24*	End Connection Screws
17	1	Top Cap
18	4*	Top Cap Screws
19	1	Top Cap O-Ring(s)
*Quantity depends on size and Configuration		

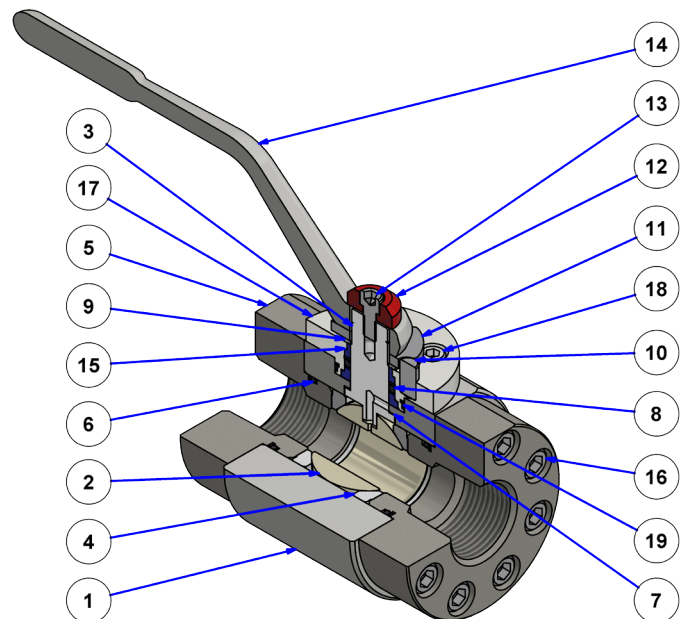

BVQ/BVQG 6000 PSI

Ordering Codes Summary

Size Codes	
Code	Port Size
0500	½"
0750	¾"
1000	1"
1250	1 ¼"
1500	1 ½"
2000	2"
2500+	2 ½" - Call

***All sizes are reduced Bore please check dimensional chart.**

Call Factory for larger sizes 18"+

BVQ
or
BVQG

S

2

2

4

3

See page 14 for accessory codes

*

*

*

*

*

*

Connection Types

Imperial Threads

Code	Description
S	SAE ORB
N	NPT

Metric Threads

B	BSPP
---	------

ISO Threads

IU	ISO6149
----	---------

Welded

W*	Socket Weld
WB*	Butt Weld

Flanged

A*	ANSI Flanges
F*	SAE 4-Bolt UNC
G*	SAE 4-Bolt Metric
S*	SAE Split

Grayloc®

GR*	Grayloc® Hub
-----	--------------

O-Rings

Code	Description
1	Buna-N
2	EPR
3	Viton™
5	Chemraz™
6	Kalrez
7	Buna-3716 (Low Temp)

Seals, Bushings, Washers

Code	Description
1	Delrin™
4	High Temp Peek
6	Delrin™ AF (low Friction)

Ball & Spindle

Code	Description
2	Stainless Steel - 316
6	416 Stainless Spindle 316 Stainless Ball

Body & End Connections

Code	Description
1	Carbon Steel - ASTM A108
2	Stainless Steel - 316

Note: Changes to Sealing Materials may result in changes to temperature and/or pressure rating.

Due to our policy of continual product improvement, the specifications in this catalog may change without notice. When designing by spec, please request a certified print.



www.dmic.com
DMIC BALL VALVES CATALOG
COPYRIGHT ©2025 DELAWARE MFG.

DBV-2504A
PAGE 53


CALL TOLL FREE 1-800-248-3642
IN CANADA 1-800-320-3642



ISO 9001 CERTIFIED



BVQ/BVQG 6000 PSI

BVQ/ BVQG	Port Size	Rated Pressure PSI	Dimensions						
			A Length	B Body Diameter	ØC Bore	D Handle Length	E Height	F Bottom to Center	G Center to Cap
For Threaded Connection Type									
BVQ-0500****	½"	6000	3.31	2.25	0.38	4.50	3.90	1.13	1.94
BVQ-0750****	¾"		4.35	2.75	0.56	7.00	5.35	1.25	2.67
BVQ-1000****	1"		4.60	3.25	0.81	7.00	5.83	1.63	2.77
BVQ-1250****	1¼"		5.27	4.22	1.10	9.86	7.49	2.11	3.51
BVQ-1500****	1½"		5.35	4.50	1.31	9.86	8.07	2.25	3.95
BVQ-2000****	2"		6.58	4.97	1.75	9.86	8.62	2.50	4.24

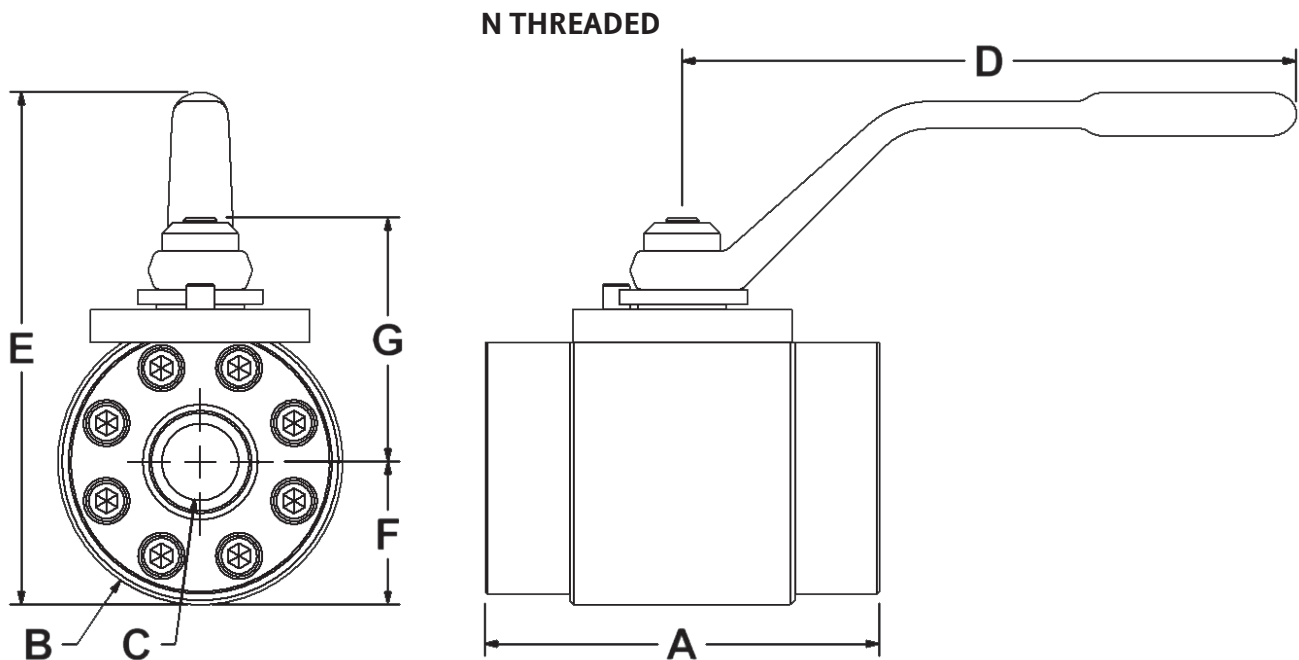

BVQ/BVQG 6000 PSI

Flow Characteristic and Actuation Torque Curves

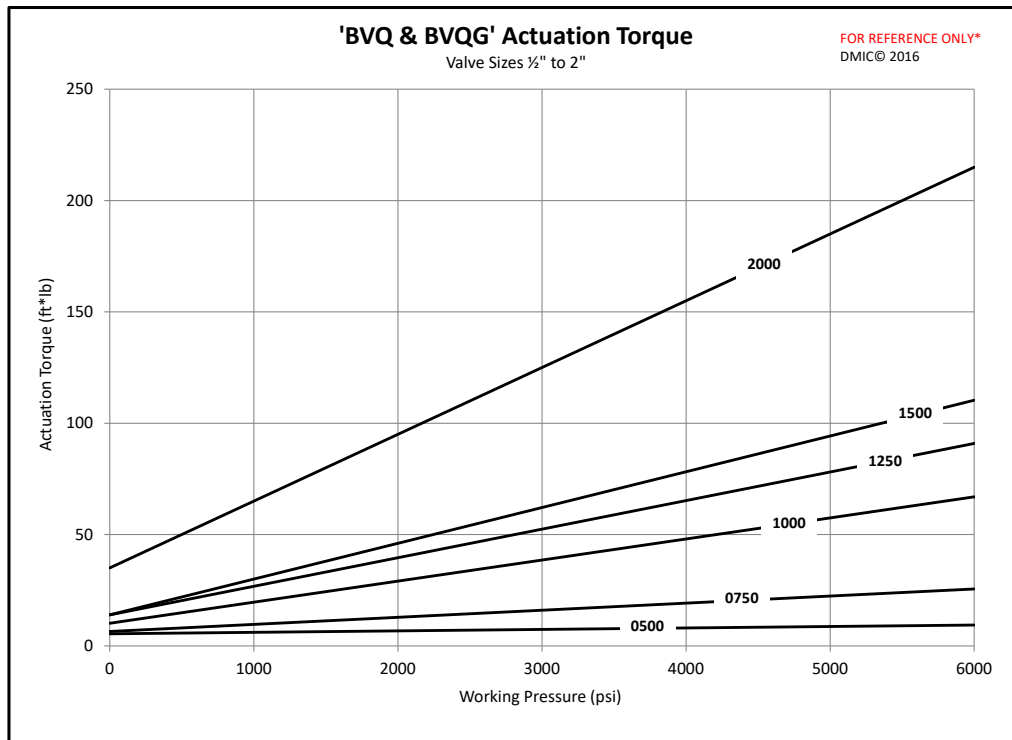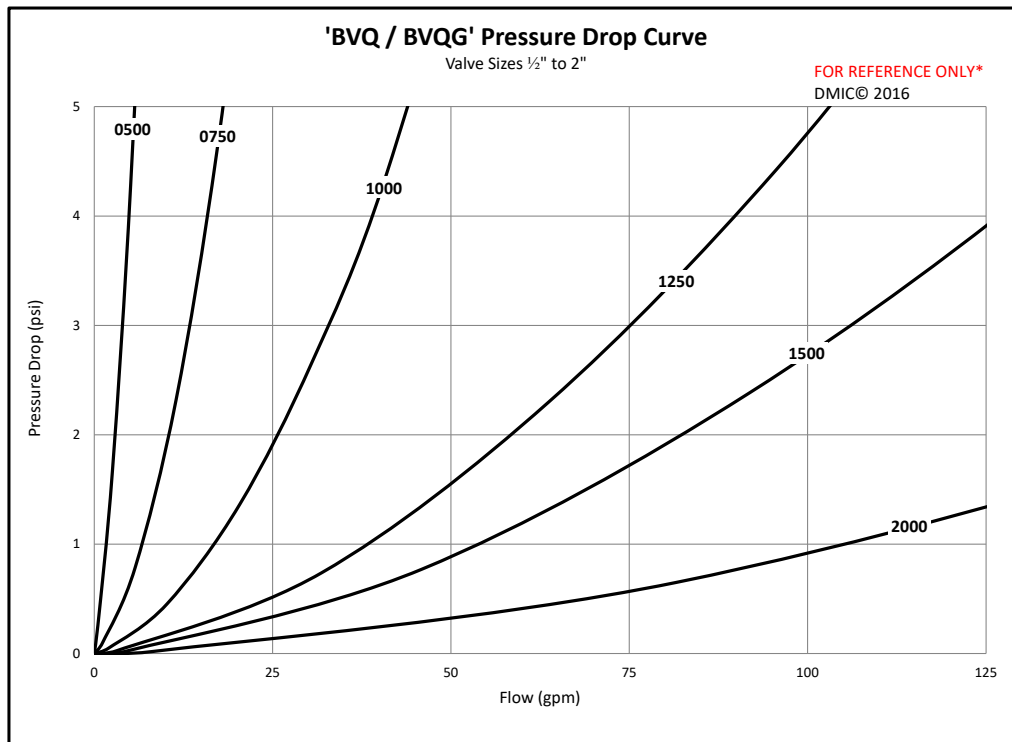

Due to our policy of continual product improvement, the specifications in this catalog may change without notice. When designing by spec, please request a certified print.

