



SSE Split Head to Thread 90°

Convert SAE/BSP ports to Split Flange connection ~ 3/4" to 5"



The SSE provides flexibility of design in O-Ring sealed power unit layout. Rigid mechanical mounting of suspended valves is made simple and repeatable.

- Standard and expanded SAE/BSP connections from 3/4" to 6" size.
- Engineered in tandem with DMIC BVAL valves, there is never a question of compatibility, tolerances, or fit.
- Step size versions and stainless steel available.
- Suction to 400 PSI.
- Made in U.S.A.
- Carbon Steel part number, see catalog F04 for other options.

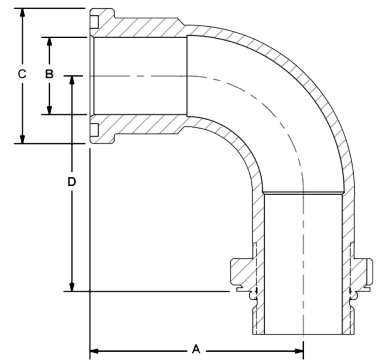

SSE		C.61 Split Flange Head to Thread, 90° Elbow				
Port Codes	Port Size	Dimensions IN				Split Flange Kit Carbon Steel)
		A	B	C	D	
SM S B	3/4"	2.75	0.75	1.50	2.79	FSL-0750SK
	1"	2.75	1.00	1.75	2.78	FSL-1000SK
	1 1/4"	3.13	1.25	2.00	3.28	FSL-1250SK
	1 1/2"	3.50	1.50	2.38	3.68	FSL-1500SK
	2"	4.25	2.00	2.81	4.40	FSL-2000SK
	2 1/2"	5.50	2.50	3.31	5.21	FSL-2500SK
	3"	6.38	3.00	4.00	6.17	FSL-3000SK
	4"	7.75	4.00	5.00	7.67	FSL-4000SK

Ordering Codes

SSE - ** SM - ** S - 1 1

O-Ring Elastomer	
Code	Description
1	Buna-N (standard)
2	Ethylene Propylene "EPR"
3	Viton

First Size Code	
Code	Port Size
07	3/4"
10	1"
12	1 1/4"
15	1 1/2"
20	2"
25	2 1/2"
30	3"
40	4"
50	5" - Call

Split Flange Side	
Code	Description
SM	C.61 Split Flange Head

Choose Adapter Size
Replace ** with the desired adapter size.
Two different size codes selects step size option.

Second Size Code	
Code	Port Size
07	3/4"
10	1"
12	1 1/4"
15	1 1/2"
20	2"
25	2 1/2"
30	3"
40	4"
50	5" - Call

Thread Side	
Code	Description
S	Swivel SAE-M ORB
B	Swivel BSPP-M

Alternate Thread Standard

Replace the "S" SAE ORB standard thread connection with a choice from the "Thread Side" table. Please call to confirm price and availability.

Adapter Material	
Code	Description
1	Low Carbon Steel
2	Stainless Steel

